

Huawei FusionCharge Fully Liquid-Cooled Ultra-Fast Charging

Jointly Charging the Road Ahead



Advocating For Sustainable Development of Future-Proof Charging Facility

Enhanced **Charging**

Faster and Quieter
Higher Utilization Rate


Superior **Quality**

Longer Lifespan
Low Failure Rate

Flexible **Architecture**


PV & ESS Convergence
Upgradeable

FusionCharge

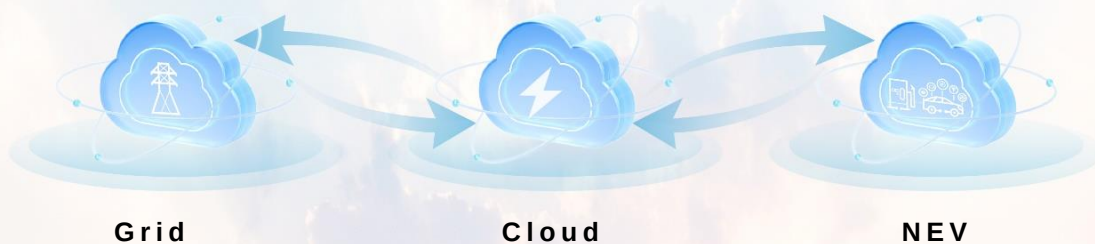

Introduction

Liquid-cooled power unit is the core part of ultra-fast DC charging system for public charging station and other sites demanding multiple fast chargers. Each power unit offers maximum 600kW output supporting up to 12 outputs. With AC/DC and DC/DC modules decoupled, power units can better utilize power capacity and be accessible to DC ESS coupling. An innovative liquid-cooled architecture with DC bus enables enhanced charging, superior quality and flexible architecture.

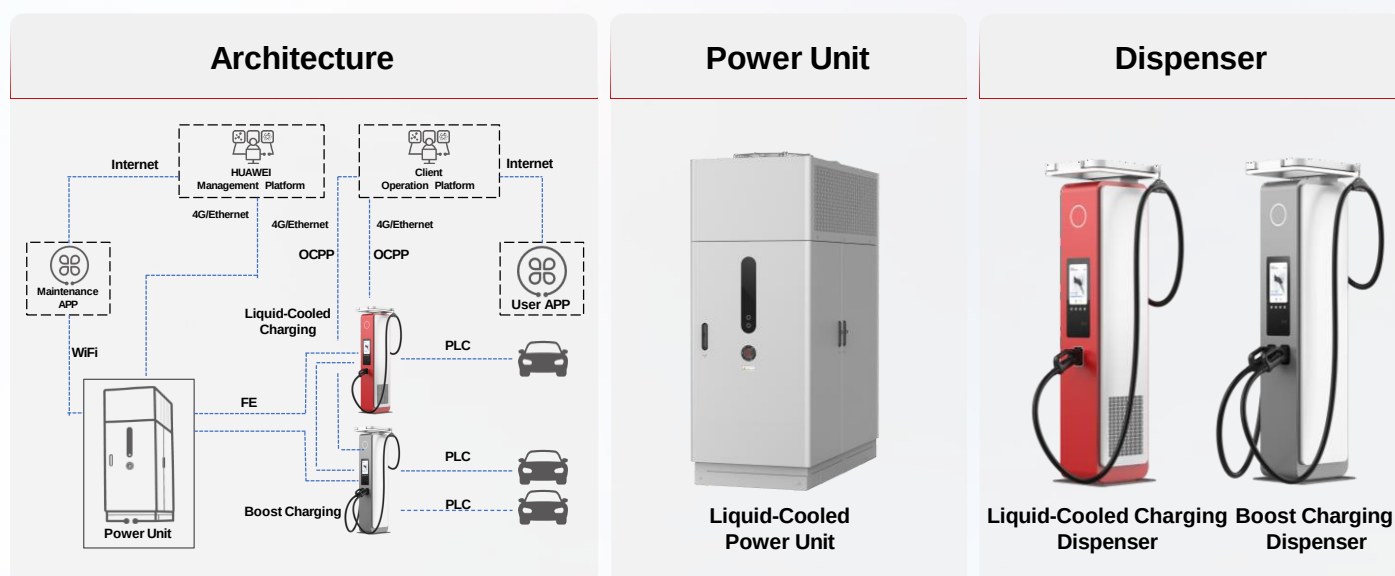

Product Features

Enhanced Charging



Power Sharing Matrix
Improving power utilization



Low Noise
≤50dB(A)@25°C

Superior Quality



Long Life
10 years lifespan



Low Failure Rate
Module failure rate < 0.2%*
* Theoretical values

Flexible Architecture



DC Bus
AC or DC ESS coupling supported



Modular Design
Multiple dispenser configurations



DS720-720LEUA1

Power Unit Specification

Basic Specifications	Dimensions (W x D x H)	800 mm x 1700 mm x 2150 mm
	Power Configuration (AC/DC+DC/DC)	600kW+720kW
	Installation Mode	Floor-mounted
	Efficiency (Full load)	94.7%
	Efficiency (Maximum)*	96%
	Cooling	Liquid cooling
	IP Rating	IP55
	Communication Interface	4G, Ethernet (Northbound communication)
	Standby Power	35W
Input Specifications	Rated Input Voltage	2 X 400Vac, three-phase five-wire system
	Rated Frequency	45-66 Hz
	Rated Input Current	≤931 A (Output: 600kW, Input: 400Vac)
	Input Module	120kW AC/DC liquid-cooled module
	Power Factor	≥0.99 (Load≥50%)
	THDi	≤5% (Load≥50%)
Output Specifications	Output Voltage	200~1000 Vdc
	Output Module	60kW DC/DC liquid-cooled module
	Current Ripple	≤ 1.5A @frequency<10Hz; ≤ 6A@frequency<5000Hz; ≤ 9A@frequency<150kHz
	Voltage Ripple	≤ ±5V
	Charging Connector Number	Max. 12
Environmental Specifications	Operating Temperature	-35°C to +50°C
	Storage Temperature	-35°C to +70°C
	Altitude	≤4000m
	Relative Humidity	5%~95% (Non-condensing)
	Noise	≤ 55 dB(A)@25°C (Mute Mode), ≤ 60 dB(A)@25°C (Full load@1m)
Compliance		IEC 61851-1, IEC 61851-23, IEC 61851-21-2

*: The test data is from the lab environment.



Huawei Reference Dispenser Specification

Basic Specifications	Type	Liquid-cooled	Boost
	Model	DT500L1-EUA1	DT500N2-EUA1
	Dimensions (W x D x H)	≤395 mm × 495 mm × 2150 mm	≤395 mm × 495 mm × 2150mm
	Maximum Output Power* ¹	480kW	480kW
	Charging Connector Number	1 (CCS2)	2 (CCS2)
	Charging Cable Length	≥5m	≥5m
	Installation Mode	Floor-mounted	Floor-mounted
	IP Rating	IP55	IP55
	Cable Cooling	Liquid cooling	Natural cooling
	Authentication	RFID reader(ISO/IEC 14443 A / B, ISO/IEC 15693, NFC) / Credit card reader (Optional) / QR code	RFID reader(ISO/IEC 14443 A / B, ISO/IEC 15693, NFC) / Credit card reader (Optional) / QR code
	Standby Power* ²	35W	35W
	Meter Certification	MID / LNE	MID / LNE
Environmental Specifications	Operating Temperature	-30°C to +55°C(+40°C to +55°C with derating)	-30°C to +55°C(+40°C to +55°C with derating)
	Noise	≤50dB(A) @25°C (1m)	≤50dB(A) @25°C (1m)
	Storage Temperature	-40°C to +70°C	-40°C to +70°C
	Relative Humidity	5%RH-95%RH	5%RH-95%RH
	Altitude	≤2000m	≤2000m
Output Specifications	Output Voltage	200~1000Vdc	200~1000Vdc
	Rated Output Current	425A (continuous)	2 × 375A (continuous)
	Maximum Output Current	500A (20min@40°C)	single connector 500A (20min@40°C)
Compliance	IEC 61851-1, IEC 61851-23, IEC 61851-21-2, IEC 62196-1, IEC 62196-3, DIN 70121, ISO15118-2		
Protections	Overvoltage protection, short circuit protection, grounding protection, overtemperature protection, leakage protection, insulation detection, door opening protection		

*¹: The output power is also limited by the power unit output capability.

*²: The assumption: ambient temperature is 25 ° C. The lamp on the top is off. The screen is off. No charging connector is inserted for charging and no solar radiation.

Huawei Digital Power Technologies Co., Ltd.

Address: Huawei Digital Power Antuoshan Headquarters, Futian District, Shenzhen

Postal code: 518084

Website: <https://digitalpower.huawei.com>

Email: support@huawei.com

Service Number: 4008302118

Trademark Notice

 HUAWEI  HUAWEI , are trademarks or registered trademarks of Huawei Technologies Co., Ltd. Other trademarks, product, service and company names mentioned are the property of their respective owners.

General Disclaimer

The information in this document may contain predictive statement including, without limitation, statements regarding the future financial and operating results, future product portfolios, new technologies, etc. There are a number of factors that could cause actual results and developments to differ materially from those expressed or implied in the predictive statements. Therefore, such information is provided for reference purpose only and constitutes neither an offer nor an acceptance. Huawei may change the information at any time without notice.

Copyright © 2025 Huawei Digital Power Technologies Co., Ltd. All Rights Reserved.

No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of Huawei Digital Power Technologies Co., Ltd.